

WE CAN
CREATE **PRIVATE** AND
SECURE SPACE FOR YOU


PERGOLA



DEMME ARCHIDESIGN S.L.
ALUMINIUM TECHNOLOGY



www.demme.es

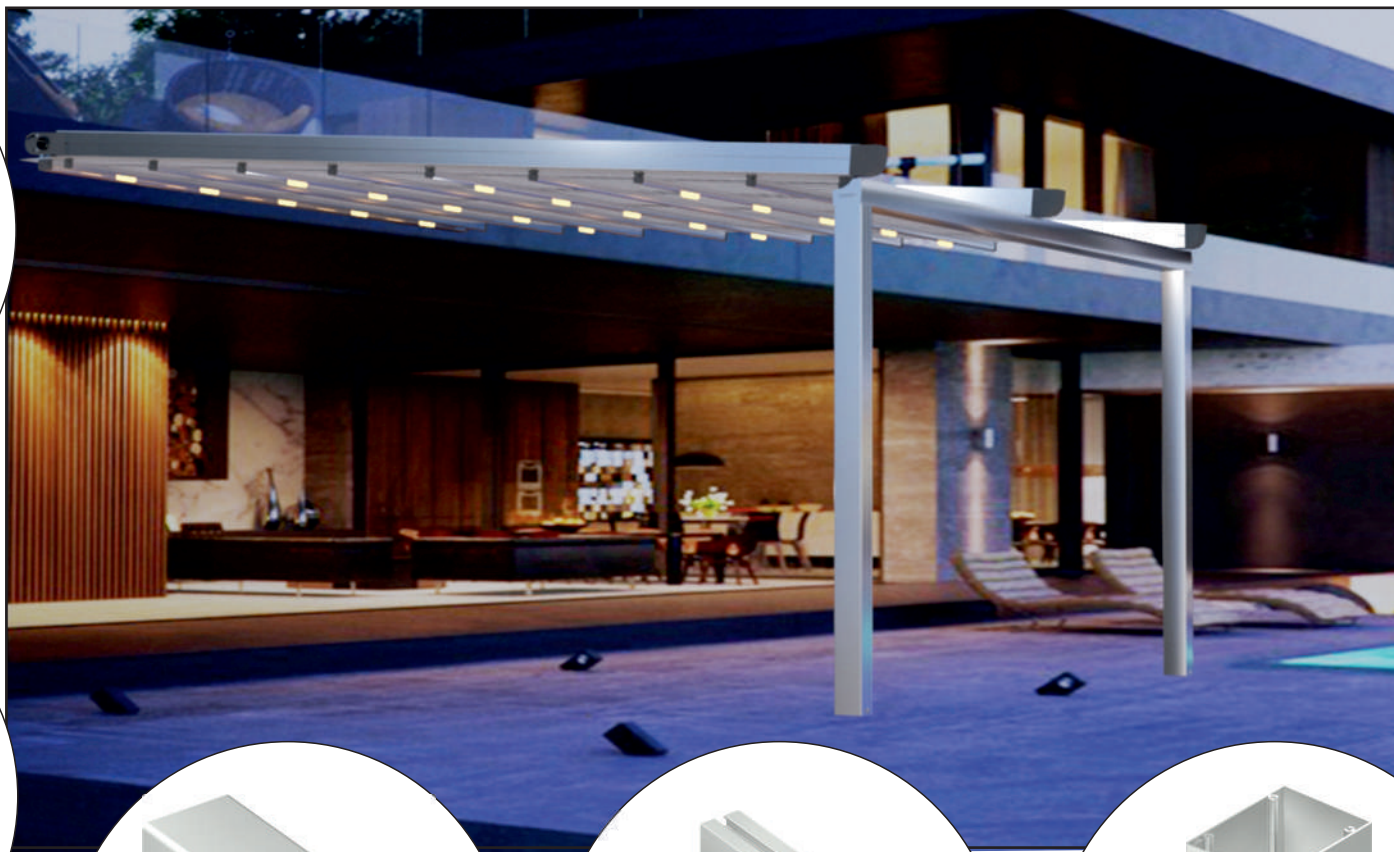

**BIG
CROSSBAR
PROFILES**
PR1005



**SMALL
CROSSBAR
PROFILES**
PR1004



RAIL
PR1003





GUTTER
PR1002




PILLAR
PR1001



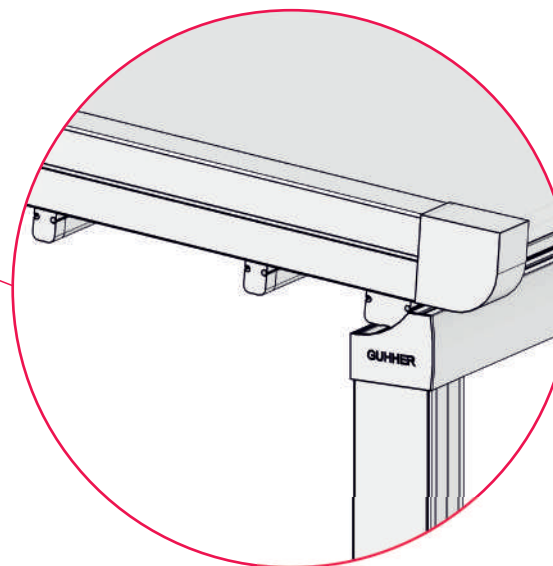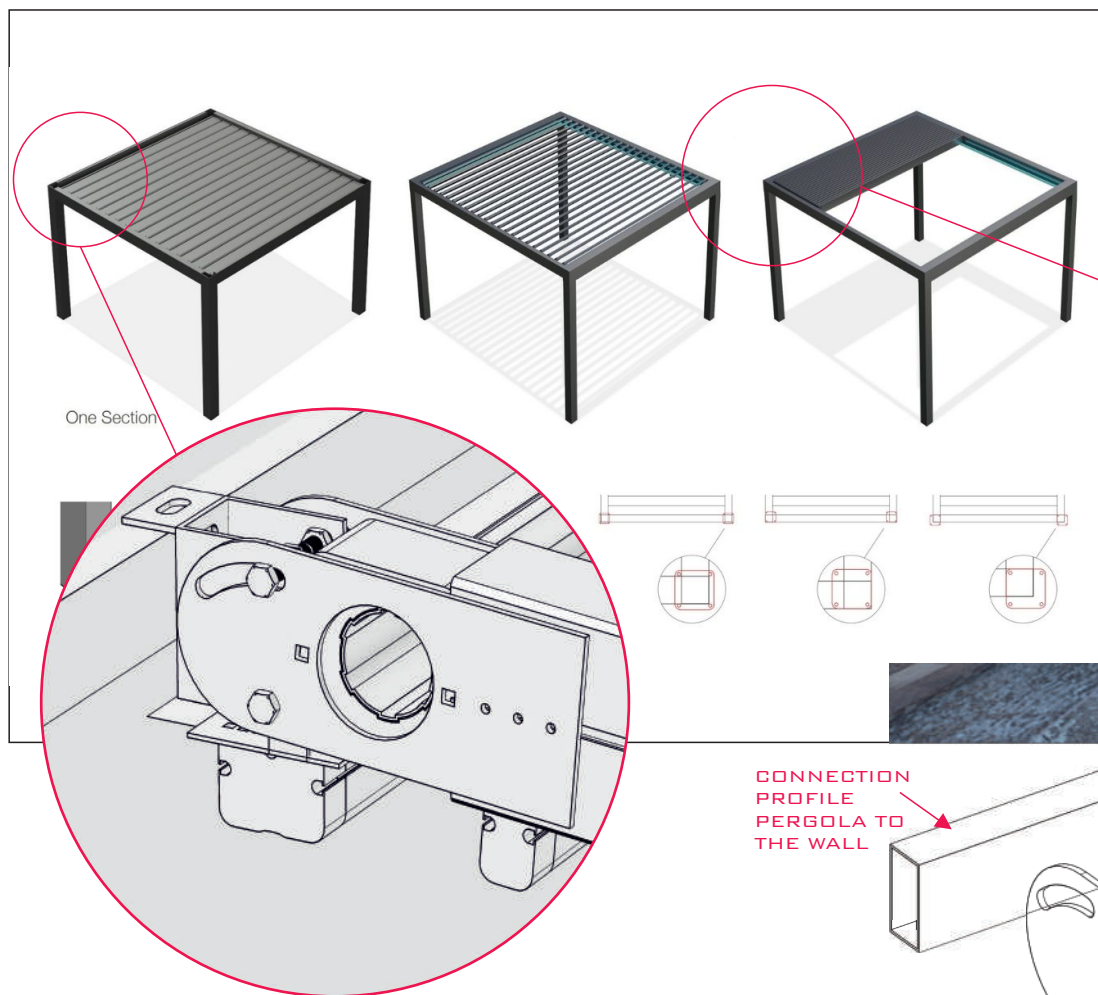

CONNECTION
PROFILE
PERGOLA TO
THE WALL

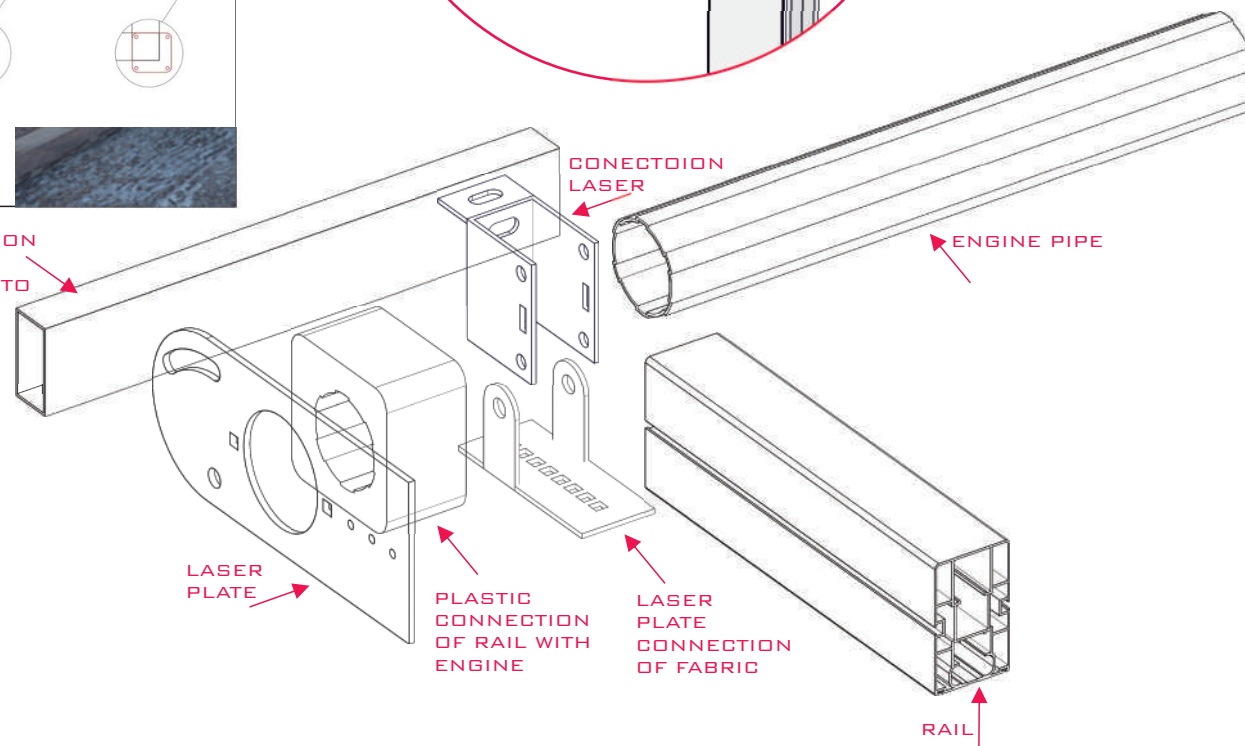

CONNECTION AND FIX PERGOLA ON THE WALL

www.demme.es






FLAT_01




ARC_01

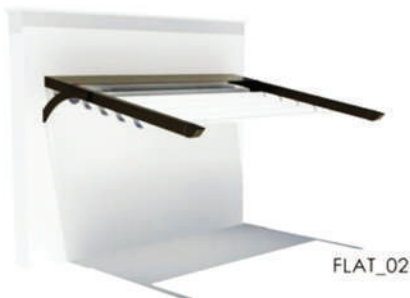

FLAT_02





ARC_02

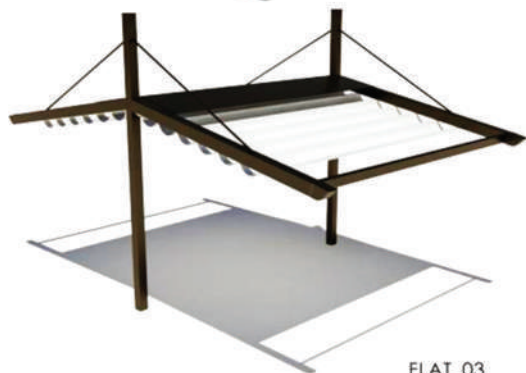


FLAT_03




ARC_03

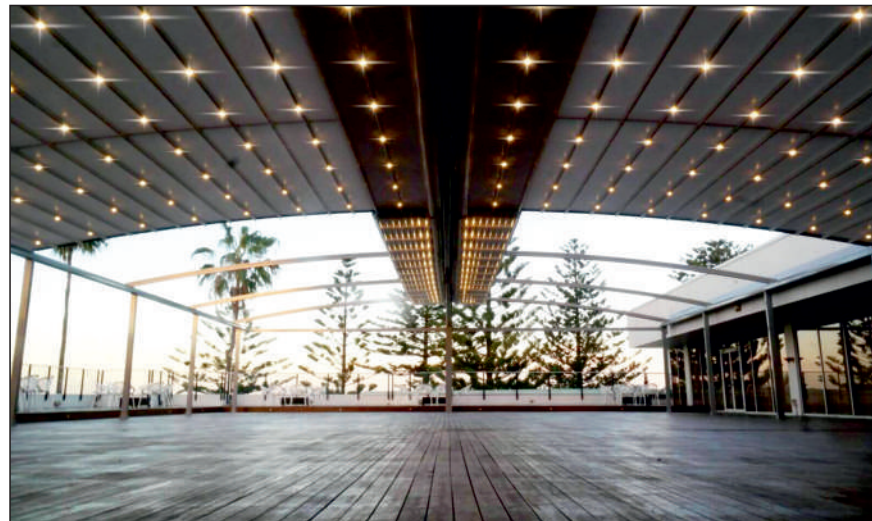


THICK RAIL




THIN RAIL




BIG
CROSSBAR
PROFILE




SMALL
CROSSBAR
PROFILE



GUTTER

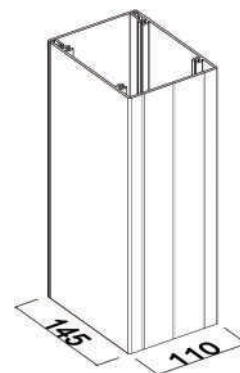

PILLAR

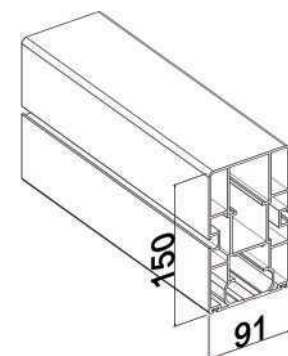

MIDDLE RAIL





www.demme.es




 DEMME ARCHIDESIGN S.L.
ALUMINIUM TECHNOLOGY

Detailed description: The company logo and name. The logo consists of a stylized 'D' made of blue and orange vertical bars. To the right of the logo, the text 'DEMME ARCHIDESIGN S.L.' is written in a large, bold, sans-serif font, and 'ALUMINIUM TECHNOLOGY' is written in a smaller, orange, sans-serif font below it.

Pergola Led Lighting

professional led system

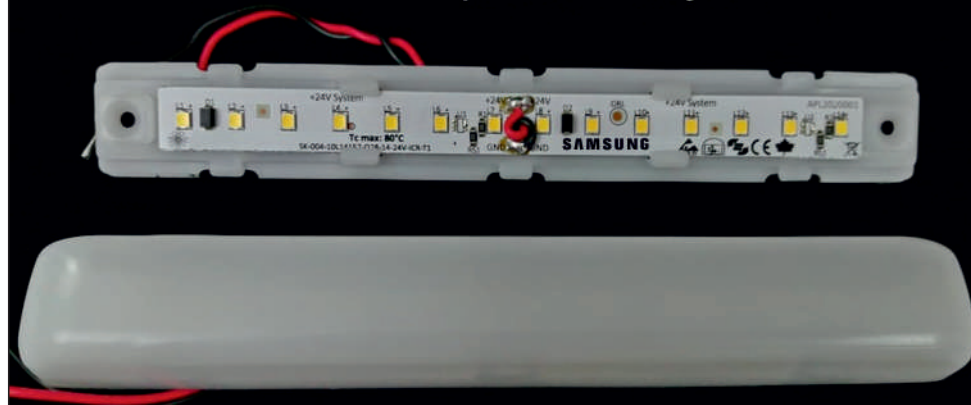

COLOR CUSTOMIZATION

YOU CAN CHOOSE THE COLOR YOU LIKE
ACCORDING TO THE BUILDING

FABRICS TESTING

EN	TEST METHOD	PHFR 870
Base Fabric		PES
Coating		PVC
Yarn (Denier)		1000x1000
Weaving		10x10
Total Weight (gsm)	TS 251:1991 METOT 6	870
Width (cm)		250, 300, 320
Tensile Strength (N/5 cm)	TS 2008 EN ISO 1421:2000 METOT 1	2300/2400 (Warp/Weft)
Tear Resistance (N)	DIN 53363	330/280 (Warp/Weft)
Adhesion (daN/5 cm)	EN ISO 2411	7
Light Fastness	ISO 105 B04:1994	6+
Water Resistance (mmSS)	TS 257 EN 20811:1996	Min. 8000
Wear	TS EN 530:2011	Min. 9000 Rotation
Temperature Resistance		-40C +70C
Flame Reterdancy	DIN4102-B2, ISO 6941:2003	PASS



FABRIC COLORS



ALUMINUM COLORS

www.demme.es





www.demme.es



 DEMME ARCHIDESIGN S.L.
ALUMINIUM TECHNOLOGY

www.demme.es



 **DEMME ARCHIDESIGN S.L.**
ALUMINIUM TECHNOLOGY